

# R 型插梢


Snap - Pin(R PIN)

仟楊工業有限公司

TCY Spring Co. Ltd.

TEL:886-2-29852139

FAX:886-2-29886548

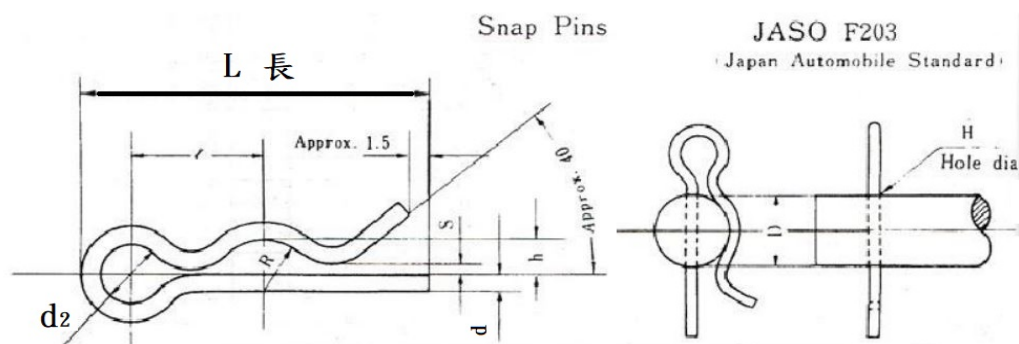

Unit:mm

| 品號       | SNAP-PIN      |               |             |             |             |         |             | Adaptable |           |
|----------|---------------|---------------|-------------|-------------|-------------|---------|-------------|-----------|-----------|
|          | d             |               | d2          | R           | h           | S       | L           | D         | H         |
| Ring No. | 標準尺寸          | 標準尺寸          | 近似          | 近似          | 近似          | 最大限度    | 近似          | 參考        | 參考        |
|          | Standard Size | Standard Size | Approximate | Approximate | Approximate | Maximum | Approximate | Reference | Reference |
| SPP - 4  | 1.0           | ±0.02         | 3.0         | 2.0         | 1.0         | 0.5     | 16.3        | 4         | 1.2       |
| 5        |               |               |             | 2.5         | 1.5         |         | 17.9        | 5         |           |
| 6        | 1.2           | ±0.03         | 3.6         | 3.0         | 1.8         | 0.6     | 21.2        | 6         | 1.5       |
| 8        | 1.6           |               | 4.8         | 4.0         | 2.4         | 0.8     | 27.7        | 8         | 1.9       |
| 10       | 1.8           |               | 5.4         | 5.0         | 3.2         | 0.9     | 32.6        | 10        | 2.2       |
| 12       |               |               |             | 6.0         | 4.2         |         | 35.8        | 12        |           |
| 14       | 2.0           | ±0.05         | 6.0         | 7.0         | 5.0         | 1.0     | 40.6        | 14        | 2.4       |
| 16       |               |               |             | 8.0         | 6.0         |         | 43.8        | 16        |           |
| 18       |               |               | 8.2         | 9.0         | 7.0         |         | 45.0        | 18        |           |
| 20       |               |               |             | 10.0        | 8.0         |         | 47.0        | 20        |           |
| 22       |               |               |             | 11.0        | 9.0         |         | 49.0        | 22        |           |
| 24       |               |               |             | 12.0        | 10.0        |         | 51.0        | 24        |           |

◎規格標準 Standard Reference

日本工業規格 JASO F 203

◎材質&硬度(參考)

Material & Hardness Ranges(Rockwell scale)

高碳鋼線材 硬度HRC 40~53 SWB or SWRH57-82

HRC40~HRC53

\*不鏽鋼製品僅接受訂購, 暫無現貨供應 Stainless Steel pins for custom made only

◎表面 Finish

鍍鋅 Zinc plating

◎包裝方式 Packaging

散裝 Bulk